

Q

De expansievatconsole is geschikt voor het bevestigen van een expansievat tot 25 liter aan de wand. De 3/4" aansluiting maakt hem universeel toepasbaar. De 1/2" aansluiting is bedoeld voor de aansluiting met de cv-installatie.

De expansievatconsole is verkrijgbaar in verschillende kleuren en met 3 of 4 aansluitingen. Zo kan niet alleen een ontluchter, maar bijvoorbeeld ook een overstortventiel op de console gemonteerd worden.

Materiaal	Q235 Staal
Kleur	Rood/Wit/Grijs/ (Zilverwit*)
Max. werkteemperatuur	90 °C
Max. werkdruk	10 bar
Mogelijke meeruitvoering	Incl. Puntstuk en Ontluchter
Aansluiting 1	G 1/2" BI
Aansluiting 2	G 3/4" BI
Aansluiting 3	G 1/2" BI
Aansluiting 4	G 1/2" BI**
Bevestigingsmethode	Sleufgaten max. 8 mm

*Enkel beschikbaar als 3-gats variant

**Enkel van toepassing bij 4-gats variant


The expansion vessel console is suitable for hanging an expansion vessel up to 25 litres. The 3/4" connection makes it universally applicable. The 1/2" connection is intended for connection to the central heating system.

The expansion vessel console is available in different colours and with 3 or 4 connections. This means that not only an air vent, but also a safety valve, for example, can be mounted on the console.

Material	Q235 Steel
Colour	Red/White/Grey/ (Silvery-white*)
Max. working temperature	90 °C
Max. working pressure	10 bar
Possible addition	Incl. Coupling and Vent
Connection 1	G 1/2" F
Connection 2	G 3/4" F
Connection 3	G 1/2" F
Connection 4	G 1/2" F**
Fastening method	Slotted holes max. 8 mm

*Only available as a 3-hole version

**Only applicable to a 4-hole variant

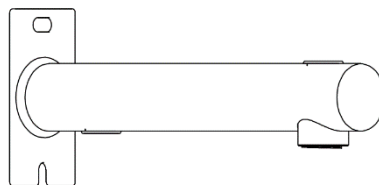



NL

1. Bepaal de positie van de expansievatconsole.
2. Boor twee gaten en bevestig pluggen.
3. Monteer de expansievatconsole met het juiste bevestigingsmateriaal.
4. Sluit het expansievat aan, gebruik hiervoor eventueel een expansievatkoppeling.
5. Sluit de cv-leiding aan, gebruik hiervoor eventueel een puntstuk.

Let op: Monteer geen expansievat groter dan 25 liter en controleer voorafgaand aan montage of de wand het gewicht kan dragen.

EN

1. Determine the position of the expansion vessel console.
2. Drill two holes and fit plugs.
3. Install the expansion vessel console with the correct mounting material.
4. Connect the expansion vessel, optionally, use an expansion vessel coupling.
5. Connect the central heating pipe, optionally, use a coupling.

Note: Do not install an expansion vessel larger than 25 litres and check before installation whether the wall can support the weight.

